

INTERACTION OF LAKES AND GROUND WATER

By
Todd A. Petersen
and
James A. Solstad

2007

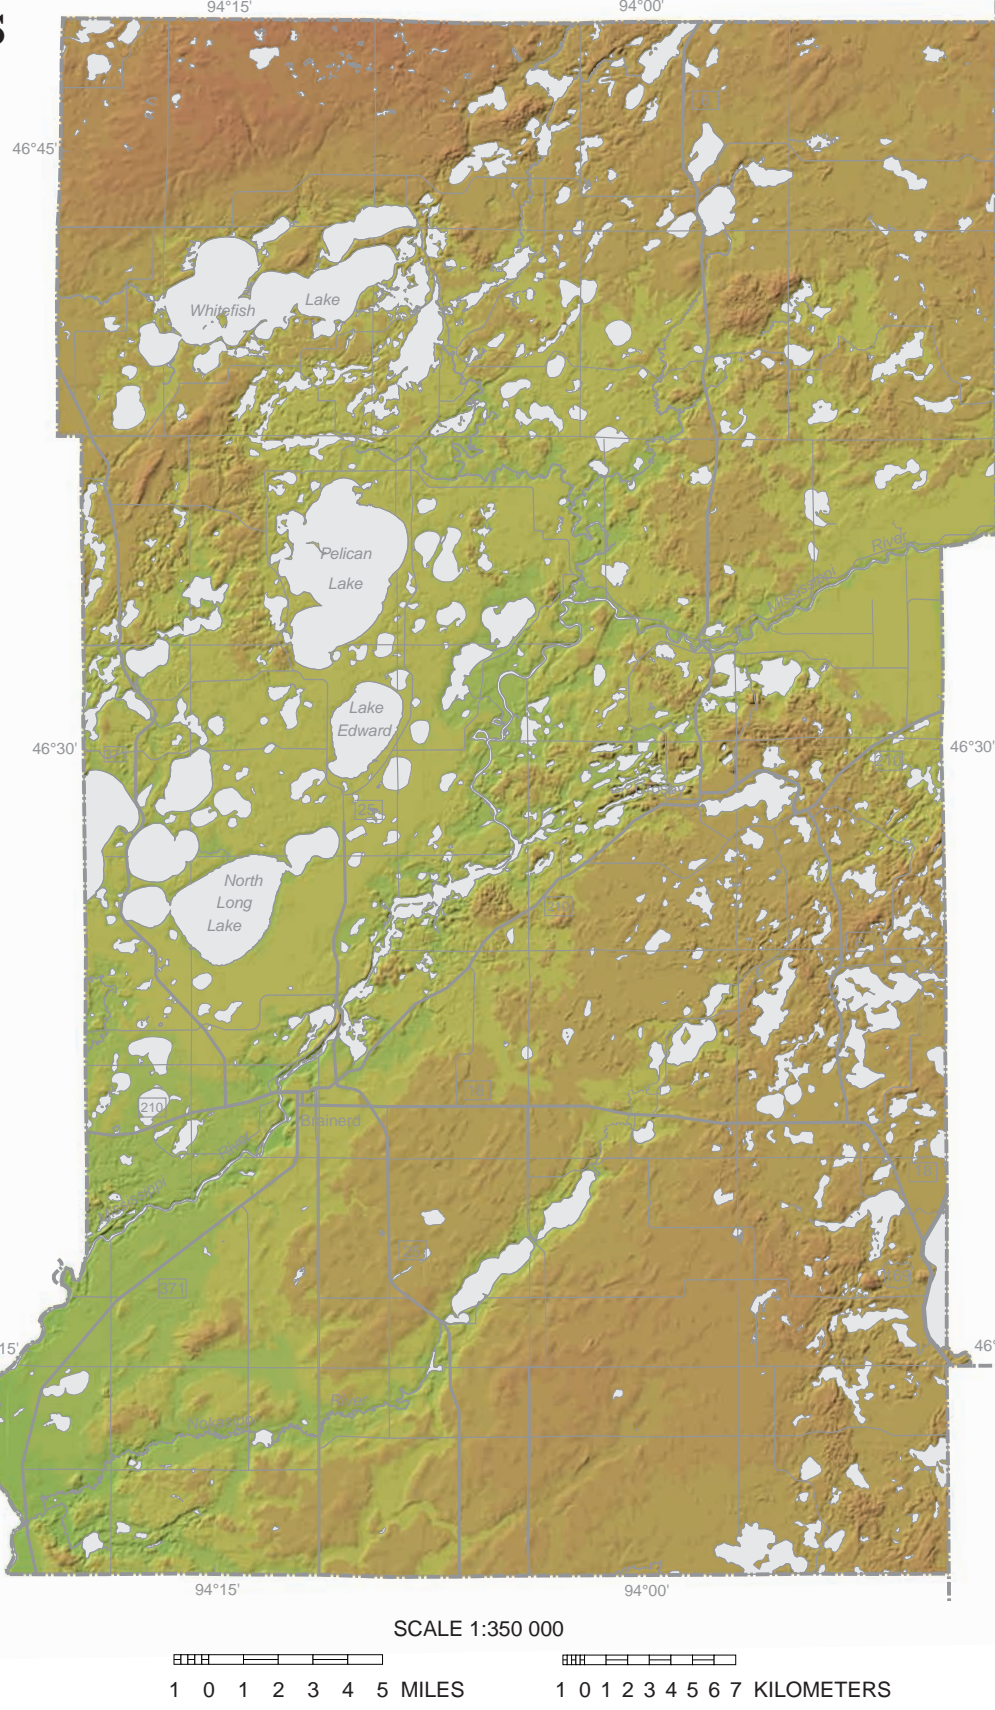
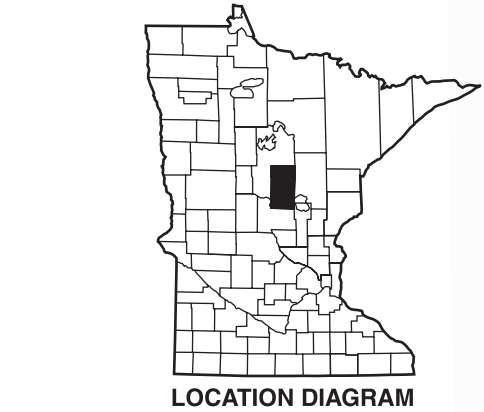


FIGURE 1. Shaded relief map of Crow Wing County. The topographic elevation in Crow Wing County varies from approximately 1130 feet in the southwest corner to approximately 1480 feet in the northwest highlands. Green areas are low elevation and brown areas are high elevation. Many lakes occur in the northern two-thirds of the county, especially in areas with low to moderate elevation. On the eastern side of the county, lakes are found at slightly higher elevations. Other parts of the county, especially the southwest and far northwest, have very few lakes. The distribution of lakes in Crow Wing County largely reflects the geologic history of the area and the sediments deposited by geologic processes.

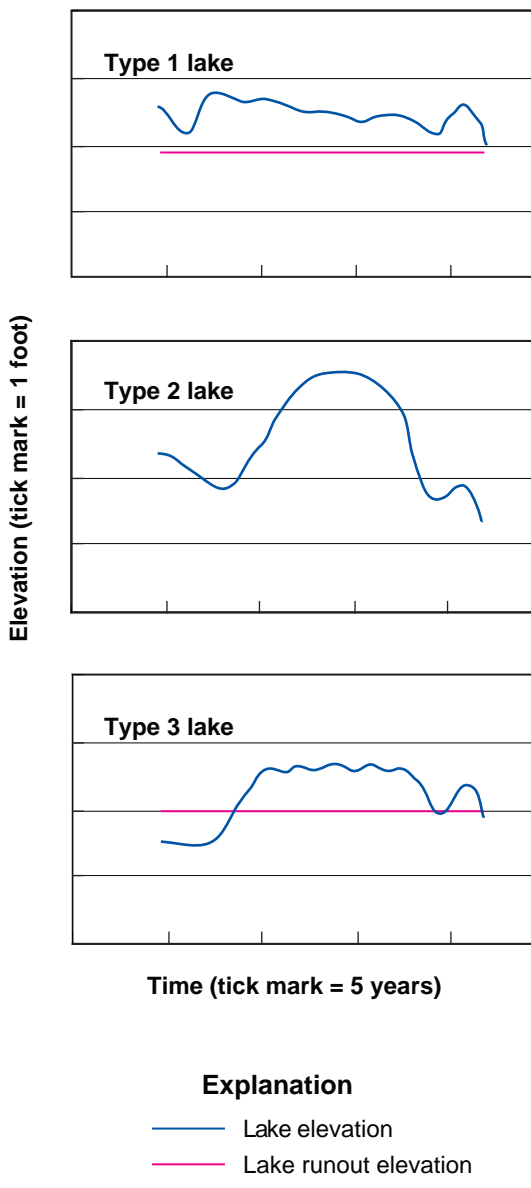


FIGURE 3. Lake types in Crow Wing County illustrated by hydrographs. The surface elevation of lake water varies with time in all lakes. The lake elevation is plotted versus time to create a chart called a hydrograph. There are three basic lake types: type 1 lakes are dominated by surface-water inflow and outflow and typically have a large ratio of contributing surface watershed area to lake area; type 2 lakes are dominated by ground-water inflow and outflow and occur in a landlocked basin with a generally small ratio of contributing surface watershed area to lake area. Type 3 lakes are intermediate to the first two conditions. Each lake type has a distinctive hydrograph. The water elevation in type 1 lakes changes relatively little over time; it generally stays just above the runoff elevation. Type 2 lakes (in a landlocked basin) do not receive enough water to rise high enough to form a surface-water runoff. The water elevation in type 2 lakes generally varies less than a foot in any given year but may vary by a few feet over a 5- to 10-year cycle. (Some landlocked lakes in Minnesota have even longer cycles that may extend 50 years to 100 years from their low to high elevation.) Changes in water elevation in type 3 lakes are similar to that of type 2 lakes; there is a relatively small variation in a particular year but a larger multyear variation. The primary difference between type 2 and type 3 lakes is that type 3 lakes will rise high enough to allow surface-water outflow for an extended period. Type 2 lakes may have a much greater difference between their low and high elevations than type 1 or type 3 lakes.

INTRODUCTION

Crow Wing County has many lakes of various sizes, and understanding the range of water elevations and maintaining water quality are significant interests of the county residents. The interaction of lake and ground water plays an important role in the variability of lake water elevation over time, and in areas where ground water is flowing into a lake, poor ground-water quality can lead to poor lake-water quality. Understanding this interaction between ground water and surface water is important to the protection of the county's lakes. These lakes are present because of the geologic history, topography, and climate of this region. Although lakes are present over much of the county (Figure 1), there are large areas without lakes.

The water elevations in the county's lakes depend on the geologic settings, the size of the contributing watersheds of surface and ground water, and the connections of lakes to streams or rivers. The water balance between the water entering and leaving the lakes determines how the lake-water elevation will change with time. Water enters the lakes via precipitation, surface-water inflow, and ground-water inflow; water leaves the lakes via evaporation, surface-water outflow, and ground-water outflow. During wet periods, more water enters than leaves the lakes and water elevations rise; during dry periods, more water leaves than enters the lakes and water elevations decline. The water in lakes is directly connected to the ground water in the surrounding sediments and is an expression of the water table.

GEOLOGIC SETTINGS OF LAKES

Most lakes in Crow Wing County are found in distinct geologic environments (Figure 2). The number of lakes and their size and depth are a result of the geology and the topography. The geologic settings of most lakes in the county are Glacial Lake Brainerd deposits and outwash. Lakes cover about 29 percent of the surface area formerly occupied by Glacial Lake Brainerd (the highest percentage in the county) and about 27 percent of the surface area where lakes are present. In these two geologic settings, the lakes vary in size from small ponds to the largest lakes in the county (some deeper than 100 feet) and are a vital part of the landscape. Outwash was deposited by meltwater from both the Rainy Lake (Brainerd assemblage) and the Superior lobe (Mille Lacs deposits). Brainerd assemblage outwash (bo) contains very large lakes. Mixed outwash (mbo), Brainerd outwash reworked by Mille Lacs outwash or covered by a veneer of Mille Lacs outwash, has slightly fewer lakes than the Brainerd outwash. Mille Lacs outwash (mo) covers only a small area and has only small lakes associated with it. As active Rainy lobe ice retreated to the northeast, large blocks of ice not connected to the main ice sheet remained behind in a topographic lowland. Glacial Lake Brainerd deposits and Brainerd assemblage outwash were deposited on top of these stagnant ice blocks. The outwash formed the higher ground around Glacial Lake Brainerd. After the glaciers retreated farther and Glacial Lake Brainerd drained, the stagnant ice melted leaving depressions of various sizes that filled with water and formed the existing lakes (Plate 3, Part A). Many of these lakes have streams (either perennial or intermittent) flowing in and out, but some lakes are landlocked and surface water rarely flows out. Because of the low topographic gradient, generally poor surface drainage, and the coarse-grained sediments (sand or sand and gravel) that surround most lakes in this area, ground-water inflow and outflow in the lakes is a significant part of the water balance. The ground-water flow, however, is not well quantified. The Garrison till deposits are also the geologic setting of many lakes that formed after stagnant ice blocks melted. About 24 percent of the surface area dominated by Garrison till deposits is covered by lakes. The topography has much more relief than the areas where Glacial Lake Brainerd deposits or outwash occur. The lakes in Garrison till deposits are

typically somewhat smaller and shallower than in the previous geologic settings, but some lakes are large and deep. The Garrison till deposits are somewhat finer grained than the Glacial Lake Brainerd deposits and much finer grained than the outwash; consequently, ground water moves more slowly through the till, which limits the ground-water inflow and outflow of lakes. Perennial streams connect many of these lakes. This suggests that these lakes have continuous inflow and outflow of surface water. However, little long-term hydrologic data are available to confirm this assumption.

The Aitkin assemblage sediments are the geologic setting of fewer lakes than the settings previously described. They were deposited at a lower elevation, and stagnant ice deposits, which are responsible for many lakes in other geologic settings, apparently were not present in Glacial Lake Aitkin II (the second and final episode of Glacial Lake Aitkin). Lakes cover about 17 percent of the surface area dominated by Nelson Lake till, where it is topographically above the Glacial Lake Aitkin II shoreline (atl). Nelson Lake till that lies below the Glacial Lake Aitkin II shoreline (atw) is the setting for very few lakes (about 4 percent of the land area). The area mapped as agl (Glacial Lake Aitkin II deposits) is flat and has virtually no lakes or streams. Artificial drainage ditches (streams that appear as straight lines on the map) were excavated to better drain the area.

The topographically high areas north of Whitefish Lake and south of the Mississippi River are mostly underlain by South Long Lake till deposits. The South Long Lake till on which drumlins were formed occurs in the southern part of the county and has very few lakes (less than 1 percent of the surface area). The South Long Lake till that does not have drumlins (mostly north of Whitefish Lake) has a few more lakes, but they are all very small and only cover about 7 percent of the surface area. The high elevation, smooth surface, and relatively high permeability of the till explain why so few lakes are associated with these deposits.

INTERACTION BETWEEN LAKE AND GROUND WATER

All lakes in Crow Wing County are connected to ground water, but the specific interaction between lake and ground water depends on the geology, topography, and volume of surface-water inflow and outflow associated with the lake. Those conditions contributed to the identification of three basic lake types (Figure 3):

- Type 1 lakes are dominated by surface-water inflow and outflow resulting from a large ratio of contributing surface watershed area to lake area.
- Type 2 lakes are dominated by ground water and occur in a landlocked basin typically having a small ratio of contributing surface watershed area to lake area.
- Type 3 lakes are intermediate to types 1 and 2.

The water elevations in type 1 lakes fluctuate rapidly because of short-term weather patterns, but the average water levels do not vary much from year to year. The water elevations in type 2 lakes vary much more than in type 1 lakes. They are low during extended dry periods, when evaporation is high and precipitation is low, and high during wet periods, when precipitation is high and evaporation is generally low. In addition, water elevations in type 2 lakes change slowly over time as ground-water levels change in response to climatic changes. The water elevations in type 3 lakes drop below their runoff elevations during extended dry periods and respond like type 2 lakes. During extended wetter than normal periods, water elevations in type 3 lakes rise up to or just above their runoff elevations and the lakes respond like type 1 lakes.

The ratio of contributing watershed area to lake area is an important indicator of how a lake's water elevation will change over time. All surface watersheds have been mapped in Crow Wing County (Minnesota Department of Natural Resources, 2007a), and many lakes have water-elevation data (Minnesota Department of Natural Resources, 2007b). Many lakes

have water-elevation data beginning in 1989; some elevation data extend back to the 1930s.

Ross Lake (Figure 4) and Clark Lake (Figure 5) are type 1 lakes dominated by surface-water flow. Ross Lake is located in Garrison till deposits and Clark Lake is located in Glacial Lake Brainerd deposits. Both lakes have relatively large ratios of contributing surface watershed areas to lake areas: 19:1 for Ross Lake and 42:1 for Clark Lake. As a result, they usually receive sufficient surface-water inputs to maintain their water elevations above their runoff elevation. During the period of record since 1984, the water elevation on Ross Lake has fallen below its runoff elevation on several occasions during the late summer despite a relatively large watershed to lake area ratio. This indicates that the combined surface and ground water entering the lake is insufficient to offset evaporation losses.

Horseshoe Lake (Figure 6) is a type 2 lake, a landlocked basin with a small ratio of contributing surface watershed area to lake area (2.6:1). It is located in Brainerd assemblage outwash, which is relatively coarse, and is dominated by ground-water inflow and outflow. The yearly water-elevation fluctuation is generally very small, from 0.5 foot to 1 foot. The multyear water-elevation fluctuations, which are controlled by long-term climatic changes, are much larger, from 2 feet to 3 feet.

Lake Hubert (Figure 7) is a type 3 lake, representing an intermediate condition in which the water elevation is sometimes above and sometimes below the runoff elevation. It has a relatively small 3.4:1 ratio of contributing surface watershed area to lake area. The lake is located between Brainerd assemblage outwash on the north and west and Glacial Lake Brainerd deposits on the south and east. During extended wet periods, the surface- and ground-water inputs raise and maintain the water elevation above its runoff elevation. During extended dry conditions, the lake's water elevation is consistently below its runoff elevation.

Surface-water elevations and ground-water elevations can be very similar over the same period of time as shown in Figure 8, which compares the Lake Edward hydrograph and the hydrograph of monitoring well 18000 (a Department of Natural Resources water-table well about 2 miles west of the lake). Both the lake and the monitoring well are located in Glacial Lake Brainerd deposits. Monitoring well 18000 is downgradient from Lake Edward, so its ground-water elevation is slightly lower than the lake's surface-water elevation. Only one small, perennial stream flows into Lake Edward, so the lake's surface-water elevation is probably controlled by ground-water levels. The two hydrographs are very similar; they generally rise and fall together and have about the same 3-foot range. Water elevations on both hydrographs are low in dry years and high in wet years. Lake Edward is a type 3 lake with a small ratio (2.1:1) of contributing surface watershed area to lake area. It has a surface-water outflow during extended wet periods, but the water elevation drops below its runoff elevation during dry periods.

Water elevations in Clark Lake (type 1) and Lake Hubert (type 3) demonstrate that a surface watershed can change between extended wet and dry periods. During wet periods, the water elevation in Lake Hubert is above its runoff elevation, so its watershed contributes to Clark Lake (Figure 9). During dry periods, the water elevation in Lake Hubert drops below its runoff elevation, so surface water does not flow to Clark Lake; this change reduces the effective ratio of contributing surface watershed area to lake area for Clark Lake. Even in dry periods, however, the ratio of Clark Lake's surface watershed area to lake area only drops to 28:1. This is still a relatively high ratio, so the lake remains dominated by surface-water inflow. Other lakes might be more affected by extended dry periods if the ratio of contributing surface watershed area to lake area changes more dramatically.

The flow direction of ground water often differs from the flow of surface water in a surface watershed. One example of the difference between surface-water flow and ground-water flow is illustrated by Lake Hubert. This difference is described more fully in the next section.

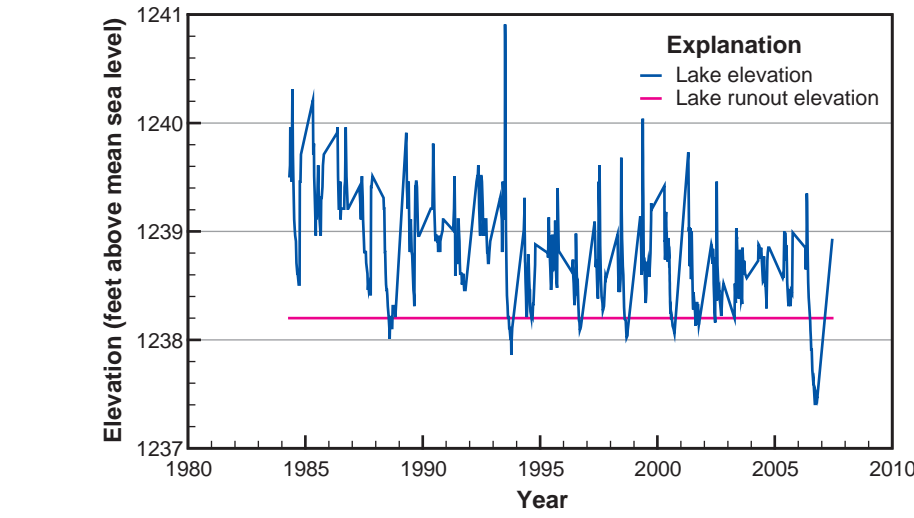


FIGURE 4. Ross Lake hydrograph. Ross Lake is a type 1 lake in Garrison till deposits and has a relatively large ratio (19:1) of contributing surface watershed area to lake area. On several occasions during the late summer, however, the combined surface and ground water entering the lake was insufficient to offset evaporation losses, and the water level dropped below its runoff elevation.

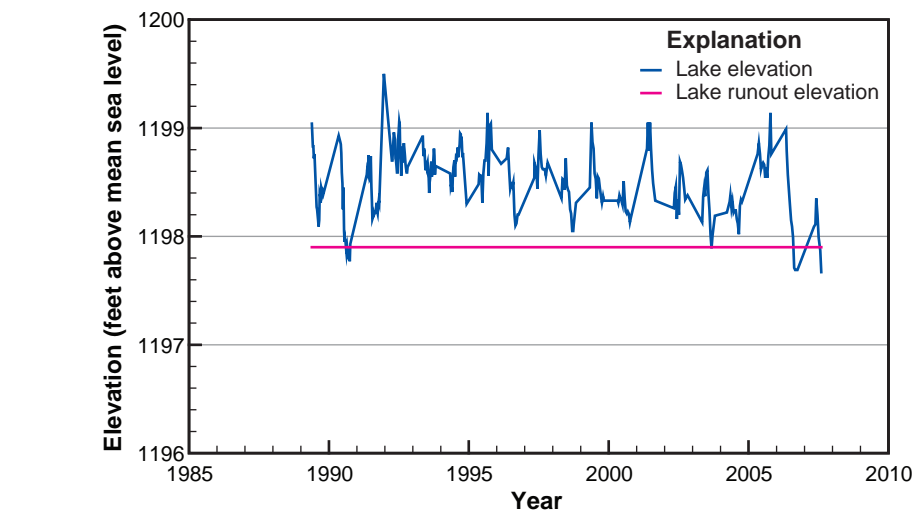


FIGURE 5. Clark Lake hydrograph. Clark Lake is a type 1 lake in Glacial Lake Brainerd deposits. It has a relatively large ratio (42:1) of contributing surface watershed area to lake area. During most years, it received sufficient surface-water input to maintain the water elevation above its runoff elevation.

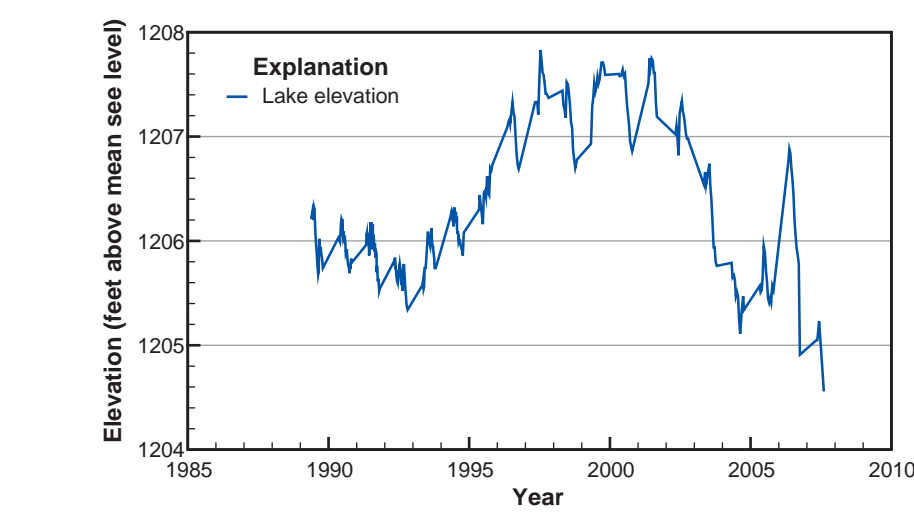


FIGURE 6. Horseshoe Lake hydrograph. Horseshoe Lake is a type 2 lake in a landlocked basin, with a very small ratio (2.6:1) of contributing surface watershed area to lake area. It is dominated by ground-water flow. The yearly water-elevation fluctuation is generally very small; the multyear water-elevation fluctuation is much larger.

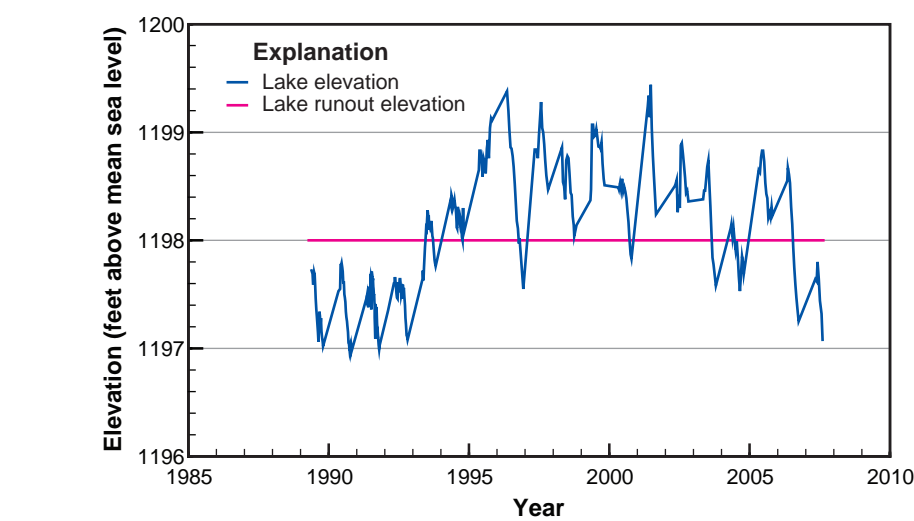


FIGURE 7. Lake Hubert hydrograph. Lake Hubert is a type 3 lake with a small ratio (3.4:1) of contributing surface watershed area to lake area. It rises high enough to have a surface-water outflow during wet years, but during extended dry conditions, its water elevation is consistently below its runoff elevation.

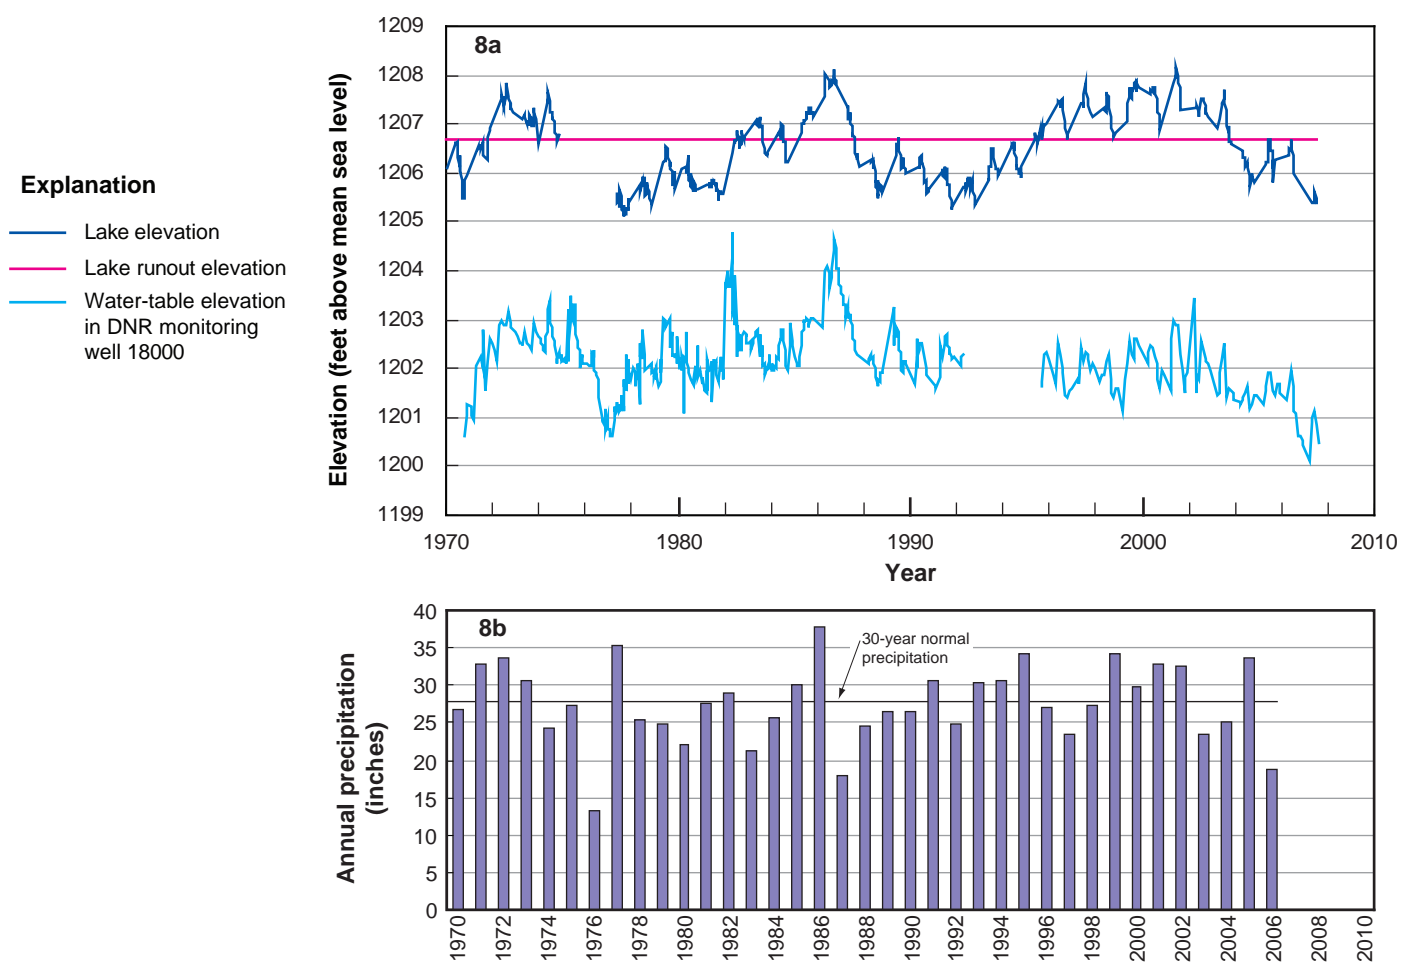


FIGURE 8. Comparison of the hydrographs of Lake Edward and a nearby water-table monitoring well 18000 from 1970 to 2006 precipitation. The hydrographs of Lake Edward and DNR water-table monitoring well 18000 from 1970 to 2006 are shown in Figure 8a. A chart of the annual precipitation at Brainerd is shown in Figure 8b. Lake Edward is a type 3 intermediate lake with a small ratio (2.1:1) of contributing surface watershed area to lake area. Lake Edward exhibits a multyear cycle in response to long-term climatic trends. Following the droughts of 1976 and 1987–1988, several years of greater precipitation were required for the surface-water elevation to rise above the runoff elevation. Monitoring well 18000 is completed in the water-table aquifer about 2 miles downgradient from Lake Edward, so its water elevation is slightly below the lake-surface elevation; it measures long-term fluctuation in the shallow ground-water system. The two hydrographs have a very similar shape; they generally rise and fall together and have about the same 3-foot range. Water elevations on both hydrographs are low during extended dry periods and high during wet periods.

STABLE ISOTOPE ANALYSIS OF GROUND WATER AND LAKE WATER

As shown in the section above, the interactions between lake and ground water are complex. The stable isotopes of hydrogen and oxygen are an additional tool that can be used to examine the relationship between lake and ground water. These stable isotopes can help determine whether ground water was recharged directly from precipitation, lake water, or a mixture of the two. For this project, stable isotopes of hydrogen and oxygen were analyzed for 27 ground-water samples from wells and 33 lake-water samples from 21 lakes.

Common hydrogen has only one proton, and its stable isotope, deuterium (hydrogen-2 or ²H), has one proton and one neutron. Because of this difference, deuterium weighs approximately twice as much as hydrogen. Oxygen-16 (¹⁶O) contains 8 protons and 8 neutrons, and its stable isotope, oxygen-18 (¹⁸O), contains 8 protons and 10 neutrons; thus, oxygen-18 weighs slightly more than oxygen-16. This weight difference causes the stable isotopes of hydrogen and oxygen to fractionate or separate during evaporation (Ekman and Alexander, 2002). The lighter isotopes will evaporate more easily than the heavier isotopes. Because lake water is well connected to the atmosphere, evaporation causes significant fractionation of the stable isotopes of hydrogen and oxygen, and lake water contains more of the heavier isotopes than are found in precipitation. Ground water is more isolated from the atmosphere, however, so negligible fractionation occurs.

Figure 10 is a plot of the stable isotopes of hydrogen and oxygen in sampled ground water and sampled lake water. The value on the x-axis represents the ratio of oxygen-18 to oxygen-16 in the sample divided by the same ratio in a standard. The value on the y-axis represents the ratio of deuterium to hydrogen in the sample divided by the same ratio in a standard. Values to the left on the x-axis or to the bottom on the y-axis indicate relatively more of the lighter isotope, while values to the right or to the top indicate more of the heavier isotope.

Regional background precipitation values for the stable isotopes of hydrogen and oxygen generally plot along a trend called the meteoric water line (Figure 10). The stable isotope values of water samples from lakes and ground water in Crow Wing County plot on a slightly lower slope than the meteoric water line, which indicates some evaporation. This evaporative trend crosses the meteoric water line at the average value for precipitation in the county. The slope of the evaporative trend and the location where it meets the meteoric water line depend on the local climate (primarily the average temperature and humidity) (Kendall and Doctor, 2003). Stable isotope values of lake- and ground-water samples collected for the Otter Tail Regional Hydrologic Assessment plot on the same evaporative trend as the Crow Wing data (Ekman and Alexander, 2002).

The ground-water samples that plot on the evaporative trend line away from the meteoric water line have undergone some evaporative fractionation, which means that part of this ground water was recharged from lake water. Ground-water samples that were recharged directly from precipitation will plot on the meteoric water line at the intersection with the evaporative trend. Most of the Crow Wing County ground-water samples plot near the left side of the graph where the evaporative trend meets the meteoric water line. The ground-water samples that plot where the two meet represent water that percolated into the ground after rainfall without fractionating.

Figure 10 shows that some lake-water samples are more fractionated than other lake-water samples. Water in type 1 lakes, which have large watersheds and are dominated by surface-water inflow, will be less fractionated than water in lakes with a smaller watershed and smaller component of surface water inflow. Water samples from Whitefish Lake (with a 32:1 ratio of contributing surface watershed area to lake area) were the least fractionated of

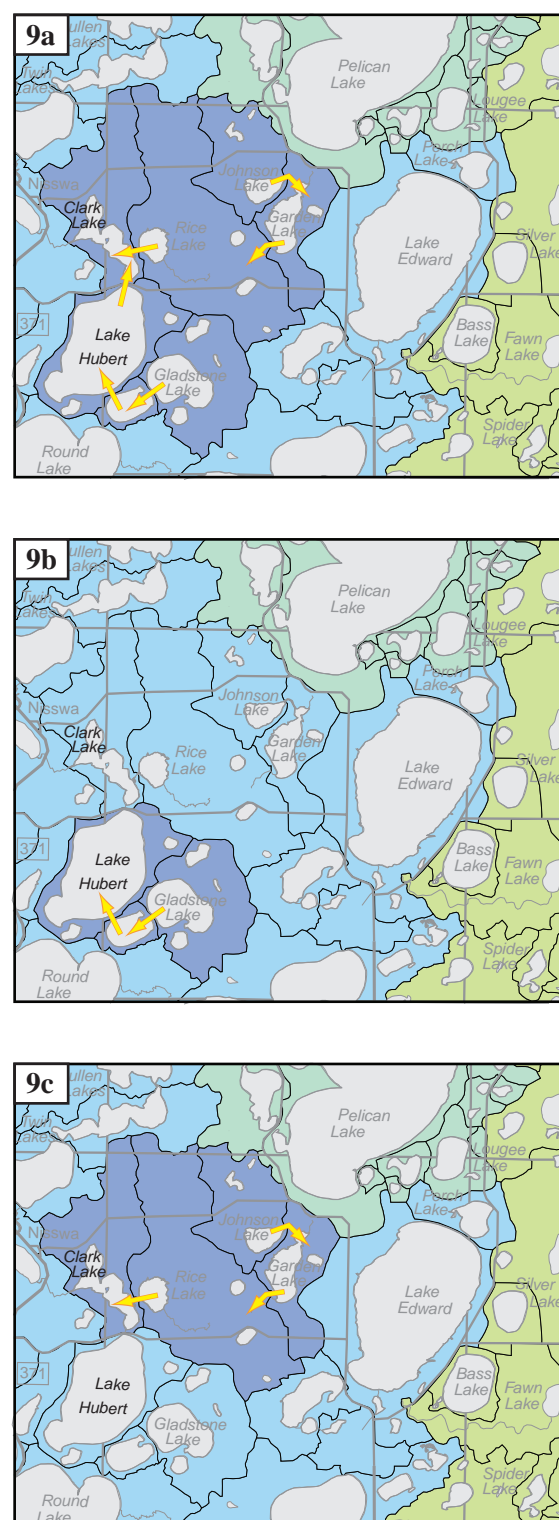


FIGURE 9. Change to contributing surface watershed area for Clark Lake in response to extended wet and dry periods. The contributing surface watershed area for Clark Lake during wet periods is shown in Figure 9a. The ratio of contributing surface watershed area to lake area for Clark Lake, a type 1 lake, is relatively large (42:1). Clark Lake's hydrograph is shown in Figure 5. In Figure 9b, the contributing surface watershed area for Lake Hubert is shown. The ratio of contributing surface watershed area to lake area for Lake Hubert (see the hydrograph in Figure 7). In Figure 9c, during extended dry periods, the contributing surface watershed area for Clark Lake does not include the contributing surface watershed area for Lake Hubert. During these periods, the elevation for Lake Hubert is below its runoff and water does not flow out to Clark Lake. As a result, the ratio of effective contributing surface watershed area to lake area for Clark Lake drops to 28:1. This is still relatively large and Clark Lake remains a type 1 lake. Even during extended dry periods, there is usually enough surface-water inflow to Clark Lake to keep its water elevation above its runoff elevation.

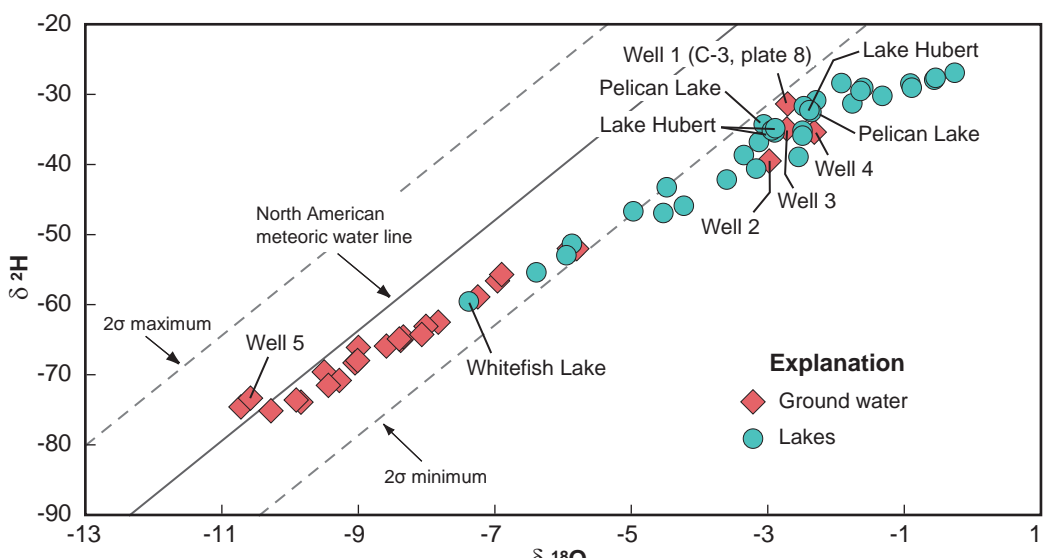


FIGURE 10. Graph of stable isotopes of oxygen and hydrogen from sampled ground water and sampled lake water in Crow Wing County. The average stable isotope values measured in precipitation generally plot along the meteoric water line. Ground-water and lake-water samples plot along a line with a smaller slope that represents an evaporative trend. The water samples that plot on this evaporative trend have a relatively greater percentage of the heavier isotopes (¹⁸O and ²H) than water from precipitation. Lake water is open to the atmosphere and the lighter isotopes (¹⁶O and ¹H) will evaporate more easily than the heavier isotopes resulting in fractionation. The ground-water samples that plot at the intersection of the meteoric water line and the evaporative trend (e.g., well 5) represent ground water directly recharged by precipitation. Ground-water samples that plot to the far right of the graph (e.g., wells 1 through 4) represent ground water recharged by lake water. The other ground-water samples probably indicate a mixture of direct recharge from precipitation and recharge by lake water. See also Figure 11.

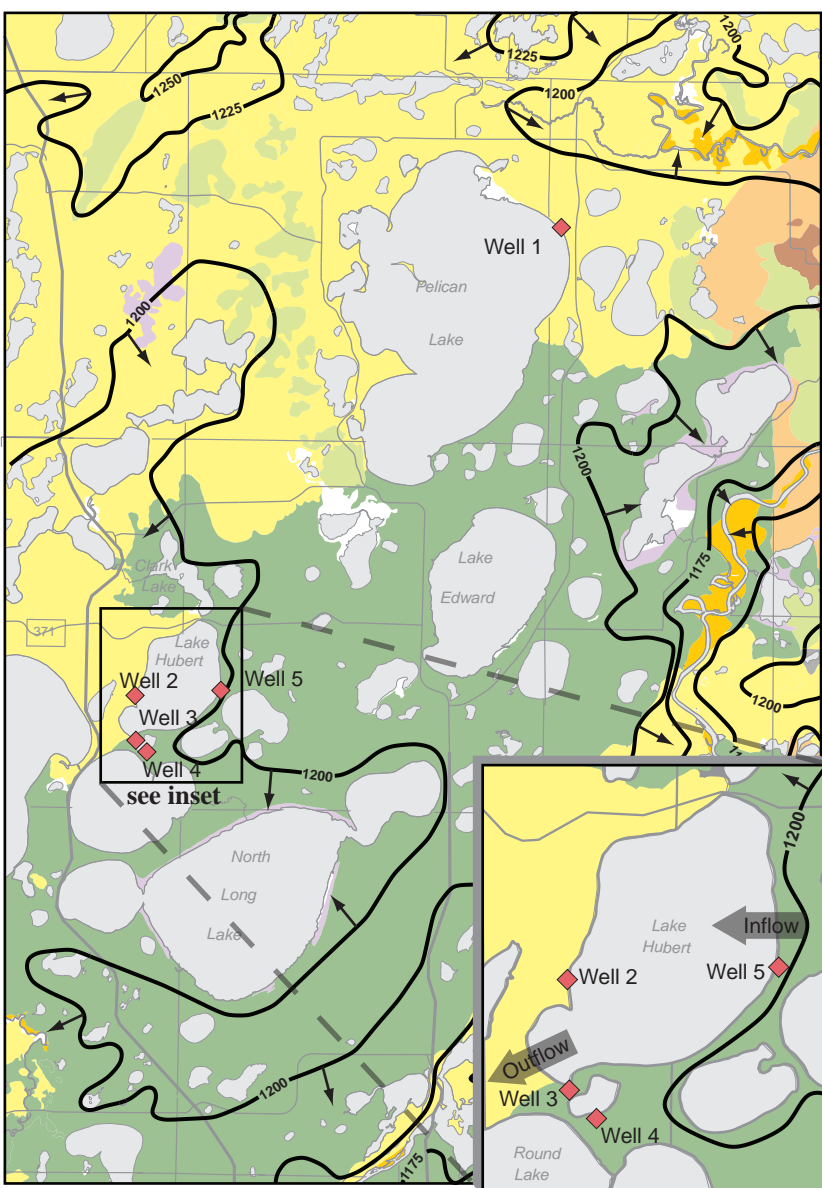


FIGURE 11. Location of wells 1 through 5 (from Figure 10) sampled for the stable isotopes of oxygen and hydrogen. Geologic settings and water-table elevation contours from Figure 2 are also shown for reference. Stable isotope samples from wells 1 through 4 all indicate that lake water is directly recharging the ground water. Water from Pelican Lake is flowing out of the lake and recharging the ground water near well 1. Near Lake Hubert, ground water is flowing from east of the lake (near well 5) into Lake Hubert (see inset). Some lake water flows out of Lake Hubert to the west and south, recharging the ground water that was sampled in wells 2, 3, and 4.

The DNR Information Center
Twin Cities: (651) 296-6157
Minnesota toll free: 1-888-646-6367
Telecommunication devices for the hearing impaired (TDD): (651) 296-5484
TDD Minnesota toll free: 1-800-657-3829
DNR web site: <http://www.dnr.state.mn.us>

This information is available in alternative format on request.

Equal opportunity to participate in and benefit from programs of the Minnesota Department of Natural Resources is available regardless of race, color, national origin, sex, sexual orientation, marital status, status with regard to public assistance, age, or disability. Discrimination inquiries should be sent to Minnesota DNR, 500 Lafayette Road, St. Paul, MN 55155-4031, or the Equal Opportunity Office, Department of the Interior, Washington, DC 20240.

© 2007 State of Minnesota,
Department of Natural Resources, and the
Regents of the University of Minnesota.

This map was compiled and generated using geographic information systems (GIS) technology. Digital data products, including chemistry and geophysical data, are available from DNR Waters at <http://www.dnr.state.mn.us/waters>. This map was prepared from publicly available information only. Every reasonable effort has been made to ensure the accuracy of the factual data on which this map interpretation is based. However, the Department of Natural Resources does not warrant the accuracy, completeness, or any implied uses of these data. Users may wish to consult other sources of information to include both references here and information on file in the offices of the Minnesota Geological Survey and the Minnesota Department of Natural Resources. Every effort has been made to ensure the accuracy of the map's content, including both geologic and cartographic products. This map should not be used to establish legal title, boundaries, or locations of improvements.

Digital base composite:
Roads and county boundaries - Minnesota Department of Transportation GIS
Statewide Base Map (source scale: 1:24,000)
Department of Natural Resources, and the
Regents of the University of Minnesota
Project data compiled from 2005 to 2007 at a scale of 1:100,000. Universal Transverse Mercator projection, zone 17 zone 15, 1983 North American datum. Vertical datum is mean sea level.
GIS and cartography by Todd Petersen and Greg Massaro. Edited by Nick Koska.