



Minnesota Department of Transportation
Photogrammetric Unit
896 John Ireland Boulevard, MS 848
Saint Paul, MN 55155

22 October 2012

Eric Ratcliffe
STARR MT-1 Project Manager
Atkins Global
3901 Calverton Boulevard, Suite 400
Calverton, MD, 20705

RE: Certification of Minnesota LiDAR Quality

Dear Mr. Ratcliffe:

Attached you will find a signed and sealed Certification Statement for LiDAR that was collected by the Minnesota Department of Natural Resources and its numerous partners. Due to the size of the State, a regional approach was selected. As part of the project planning process, we wanted to engage the county governments to be partners in this project. A decision was made to report accuracy on the county level as part of that engagement.

If you have any additional questions concerning the testing process, please contact me at 651.366.3457.

Sincerely,

Peter W. Jenkins, PLS, CFedS
Photogrammetric Unit Supervisor

Enclosures:
Certification Letter

cc:

S. Jiwani
T. Loesch

An Equal Opportunity Employer



Certification of Minnesota LiDAR Data Quality

Project Area: SE Minnesota


Counties covered: Dodge, Fillmore, Freeborn, Houston, Mower, Olmsted, Steele, Wabasha, and Winona

Date of acquisition: November 18-24, 2008

Horizontal Positional Accuracy: All these data products were acquired at 2400 meters above mean terrain (AMT) and have a horizontal accuracy of 0.40 meters, with a nominal point spacing of 1.0 meters.

Vertical Positional Accuracy: Accuracy of the dataset was verified by a second set of ground control points provided and tested by the State of Minnesota. The Consolidated Vertical Accuracy (CVA) of the TIN as tested by the State of Minnesota achieved 0.287 meters at a 95% confidence level of all land cover categories. 1009 test points covering the 5 land classes as defined by ASPRS and NDEP were used in this evaluation. The vertical RMSE and sample count per county as tested by the State of Minnesota is as follows: Dodge 0.129m, 121; Fillmore 0.155m, 128; Freeborn 0.144m, 126; Houston 0.134m, 110; Mower 0.161m, 115; Olmsted 0.117m, 125; Steele 0.125m, 137; Wabasha 0.106m, 97; Winona 0.161m, 176.

This is to certify that the work summarized above was completed in accordance with sound and accepted surveying practices and meets the accuracy requirements in the USGS's Lidar Guidelines and Base Specifications.

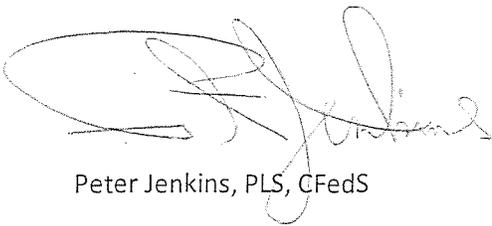

Peter Jenkins, PLS, CFedS

MN PLS # 22683

Photogrammetric Unit Supervisor

Minnesota Department of Transportation

